

## PSCN025-02P2-02S Pancake Slip Ring

Separate pancake slip ring belongs to pancake series slip ring. Its outline is different from the integrated pancake slip ring due to the separate structure. It is usually to be required on certain installation space which has no more height room, but normally the rotation speed is not too fast, like lower than 100RPM. However, CENO also designed some type of separate slip ring for some high speed what higher than 100RPM.

### Features

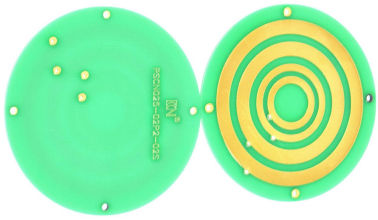
- ◆ Extremely thin, save space
- ◆ Separate rotor and stator
- ◆ Could be used in low temperature environment
- ◆ Reliable contact between brush and ring

### Applications

- ◆ Military equipment
- ◆ Rail system
- ◆ Moving medium system

### Optional

- ◆ Signal type
- ◆ Installation way
- ◆ Current rating

PSCN025-02P2-02S	Specification	Picture
Current	2*10A, 2* signal	
Rating voltage	380VAC	
Dielectric strength	≥500V@50Hz	
Insulation resistance	200MΩ@500VDC	
Working speed	0~10rpm	
Contact material	Gold to Gold	
Housing material	Oxidation Aluminum Alloy	
Working temperature	-45℃~+80℃	
Working humidity	60%RH	
PCB	FR-4	

### Outline Drawing

