

ECN000-07P3-29S Capsule Slip Ring

CENO's capsule slip rings have flexible spec options to fulfill the various and complex requirement of systems. Ring number are range from 2 rings up to 200 rings. Power and signal are easily to be integrated into one slip rings under our years of proven technique. Outstanding signal types are Ethernet, Canbus, Profibus, RS, HDMI, HD-SDI, USB and so on. Typical outside diameters including 5.5mm, 12.4mm, 22mm.

Features

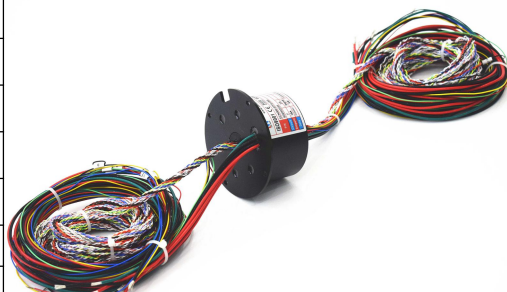
- ◆ Compact size.
- ◆ Adopt military grade surface treatment, gold to gold contacts
- ◆ Transmit data and analog signal, compatible with bus protocol

Applications

- ◆ Radar system
- ◆ Military equipment
- ◆ Medical equipment

Optional

- ◆ Circuit number
- ◆ Current rating
- ◆ Signal type
- ◆ IP protection grade

ECN000-07P3-29S	Specification	Picture
Rings	7*15A, 5*3A, 24*signal	
Voltage	0~220VAC/VDC	
Electrical noise	≤35mΩ	
Dielectric strength	≥500V@50Hz	
Insulation resistance	≥50MΩ@500VDC	
Operating speed	0-300 rpm	
Contact material	Gold to gold	
Housing material	Aluminium alloy	
IP protection grade	IP54	

Outline Drawing

